

COSPOLICH

2M
SERIES

DROP IN COLD WELLS

MODEL NUMBERS:

CFDI3T-2M-SN

CFDI4T-5M-SN

CFDI5T-2M-SN

CFDI6T-2M-SN

CFDI8T-2M-SN



DROP-IN COLD WELL

CONCEPT

This unique line of Cospolich "Drop-in Coldwells" offers both flexibility and creativity in the design of food service accommodations / space / areas. Whether converting existing counter space or designing a new space this product provides a fresh and economical alternative.

UNIT CONSTRUCTION

Exterior and interior of the Cold-well is constructed of 304 stainless steel and insulated with foamed-in-place polyurethane.

A Cospolich "Bar-tab" system is installed under the flange, around the perimeter of the well. This allows for easy installation, regardless of worktop thickness, without templating of bolt holes

REFRIGERATION

The air-cooled hermetic refrigeration package is suspended from the underside of the cold well by heavy duty structural members.

The static coils, which are enclosed in a 304 stainless steel wrapped foamed area, are copper tubes.

An on/off switch is mounted in the condensing unit section.

U.L. and U.S.P.H.

This equipment is built in accordance with Underwriters Laboratories, Inc. for safety and sanitation and standards as set forth by the U.S. Public Health Service.

ORDERING INFORMATION

- Drain location (left or right)
- Voltage: 115 VAC or 220 VAC
- Condensing unit location (left or right)

CFDI5T-2M-SN

OPTIONS

- Condensing Unit Enclosure
- Salad / Dessert Display
- Sneeze shield
- Tray Rail
- Adapter Bars
- Custom Sizes

**CONTACT FACTORY
FOR YOUR
SPECIFIC CAPACITY
REQUIREMENTS**

STANDARD FEATURES

- All stainless steel cold well with coved corner interior
- Foamed-in-place "NON-CFC" urethane insulation
- 6' Cordset for 115V AC plug-in operation
- Stainless Steel wrapped static evaporator
- "NON-CFC" refrigeration unit, utilizing 404a refrigerant
- Cospolich "Bar-Tab" mounting system

www.cospolich.com

Quality & Innovation Since 1937

DROP-IN COLD WELLS

DIMENSIONAL DATA

	CFDI3T-2M-SN	CFDI4T-2M-SN	CFDI5T-2M-SN	CFDI6T-2M-SN	CFDI8T-2M-SN
Width Overall (in / mm)	25.88 / 657	25.88 / 657	25.88 / 657	25.88 / 657	25.88 / 657
Length Overall (in / mm)	43.68 / 1110	56.43 / 1433	69.32 / 1760	82.06 / 2084	107.25 / 2724
Height Overall (in / mm)	23.75 / 603	23.75 / 603	23.75 / 603	23.75 / 603	23.75 / 603
Number of Pans	3	4	5	6	8
Weight (lbs / kg)	130 / 59	142 / 64	158 / 71	175 / 79	212 / 95

ELECTRICAL DATA

Voltage	115V	115V	115V	115V	115V
Total Amperes	6.4	6.4	6.4	10.1	10.1

REFRIGERATION DATA


Compressor H.P.	1/3	1/3	1/3	1/2	1/2
BTU / HR - KCAL / HR	1955 / 493	1955 / 493	1955 / 493	2300 / 580	2300 / 580

SHIPPING DATA

Width-Crated (in / mm)	32 / 813	32 / 813	32 / 813	32 / 813	32 / 813
Depth-Crated (in / mm)	50 / 1270	63 / 1600	76 / 1930	88 / 2235	114 / 2896
Height-Crated (in / mm)	30 / 762	30 / 762	30 / 762	30 / 762	30 / 762
Weight-Crated (lbs / kg)	182 / 82	199 / 90	221 / 99	245 / 110	297 / 134
Volume-Crated (cu ft / ltr)	28 / 793	35 / 991	42 / 1189	49 / 1388	63 / 1784



www.cospolich.com

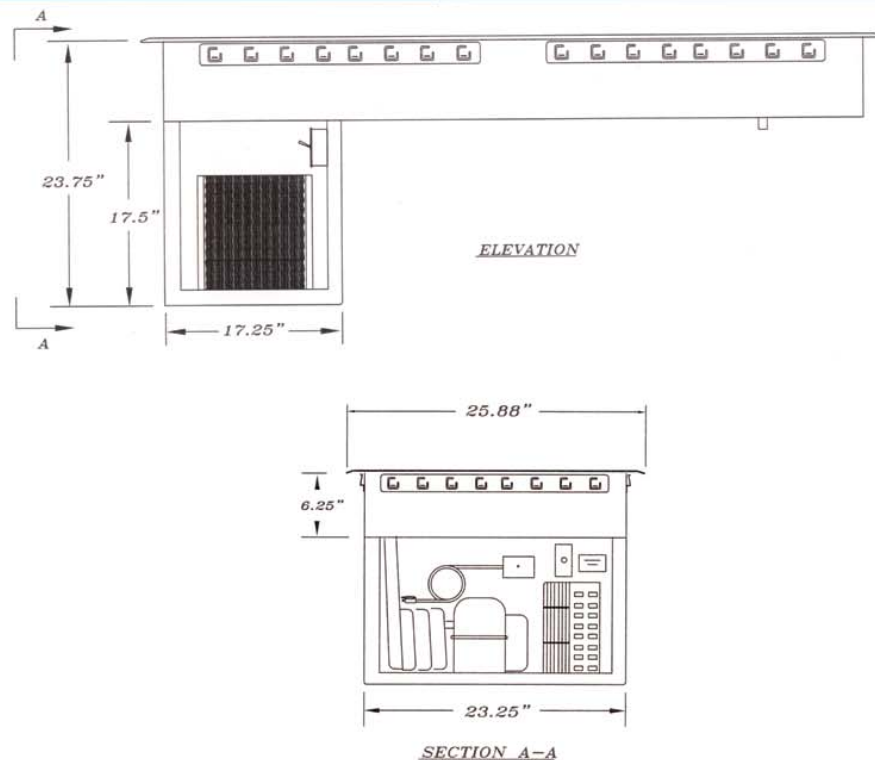

Naval Shipboard Models Available.

COSPOLICH

Post Office Box 1206 • Destrehan, Louisiana 70047

Toll Free: 800-423-7761 • Local: 985-725-0222 • FAX: 985-725-1564