

# COSPOLICH

**2M**  
SERIES

DROP IN COLD WELLS

MODEL NUMBERS:

**CFDI3T-2M-SN**

**CFDI4T-5M-SN**

**CFDI5T-2M-SN**

**CFDI6T-2M-SN**

**CFDI8T-2M-SN**



## DROP-IN COLD WELL

### CONCEPT

This unique line of Cospolich "Drop-in Coldwells" offers both flexibility and creativity in the design of food service accommodations / space / areas. Whether converting existing counter space or designing a new space this product provides a fresh and economical alternative.

### UNIT CONSTRUCTION

Exterior and interior of the Cold-well is constructed of 304 stainless steel and insulated with foamed-in-place polyurethane.

A Cospolich "Bar-tab" system is installed under the flange, around the perimeter of the well. This allows for easy installation, regardless of worktop thickness, without templating of bolt holes

### REFRIGERATION

The air-cooled hermetic refrigeration package is suspended from the underside of the cold well by heavy duty structural members.

The static coils, which are enclosed in a 304 stainless steel wrapped foamed area, are copper tubes.

An on/off switch is mounted in the condensing unit section.

### U.L. and U.S.P.H.

This equipment is built in accordance with Underwriters Laboratories, Inc. for safety and sanitation and standards as set forth by the U.S. Public Health Service.

### ORDERING INFORMATION

- Drain location ( left or right )
- Voltage: 115 VAC or 220 VAC
- Condensing unit location ( left or right )

## CFDI5T-2M-SN

### OPTIONS

- Condensing Unit Enclosure
- Salad / Dessert Display
- Sneeze shield
- Tray Rail
- Adapter Bars
- Custom Sizes

**CONTACT FACTORY  
FOR YOUR  
SPECIFIC CAPACITY  
REQUIREMENTS**

### STANDARD FEATURES

- All stainless steel cold well with coved corner interior
- Foamed-in-place "NON-CFC" urethane insulation
- 6' Cordset for 115V AC plug-in operation
- Stainless Steel wrapped static evaporator
- "NON-CFC" refrigeration unit, utilizing 404a refrigerant
- Cospolich "Bar-Tab" mounting system

[www.cospolich.com](http://www.cospolich.com)

Quality & Innovation Since 1937

# DROP-IN COLD WELLS

## DIMENSIONAL DATA

	CFDI3T-2M-SN	CFDI4T-2M-SN	CFDI5T-2M-SN	CFDI6T-2M-SN	CFDI8T-2M-SN
Width Overall (in / mm)	25.88 / 657	25.88 / 657	25.88 / 657	25.88 / 657	25.88 / 657
Length Overall (in / mm)	43.68 / 1110	56.43 / 1433	69.32 / 1760	82.06 / 2084	107.25 / 2724
Height Overall (in / mm)	23.75 / 603	23.75 / 603	23.75 / 603	23.75 / 603	23.75 / 603
Number of Pans	3	4	5	6	8
Weight (lbs / kg)	130 / 59	142 / 64	158 / 71	175 / 79	212 / 95

## ELECTRICAL DATA

Voltage	115V	115V	115V	115V	115V
Total Amperes	6.4	6.4	6.4	10.1	10.1

## REFRIGERATION DATA


Compressor H.P.	1/3	1/3	1/3	1/2	1/2
BTU / HR - KCAL / HR	1955 / 493	1955 / 493	1955 / 493	2300 / 580	2300 / 580

## SHIPPING DATA

Width-Crated (in / mm)	32 / 813	32 / 813	32 / 813	32 / 813	32 / 813
Depth-Crated (in / mm)	50 / 1270	63 / 1600	76 / 1930	88 / 2235	114 / 2896
Height-Crated (in / mm)	30 / 762	30 / 762	30 / 762	30 / 762	30 / 762
Weight-Crated (lbs / kg)	182 / 82	199 / 90	221 / 99	245 / 110	297 / 134
Volume-Crated (cu ft / ltr)	28 / 793	35 / 991	42 / 1189	49 / 1388	63 / 1784



[www.cospolich.com](http://www.cospolich.com)

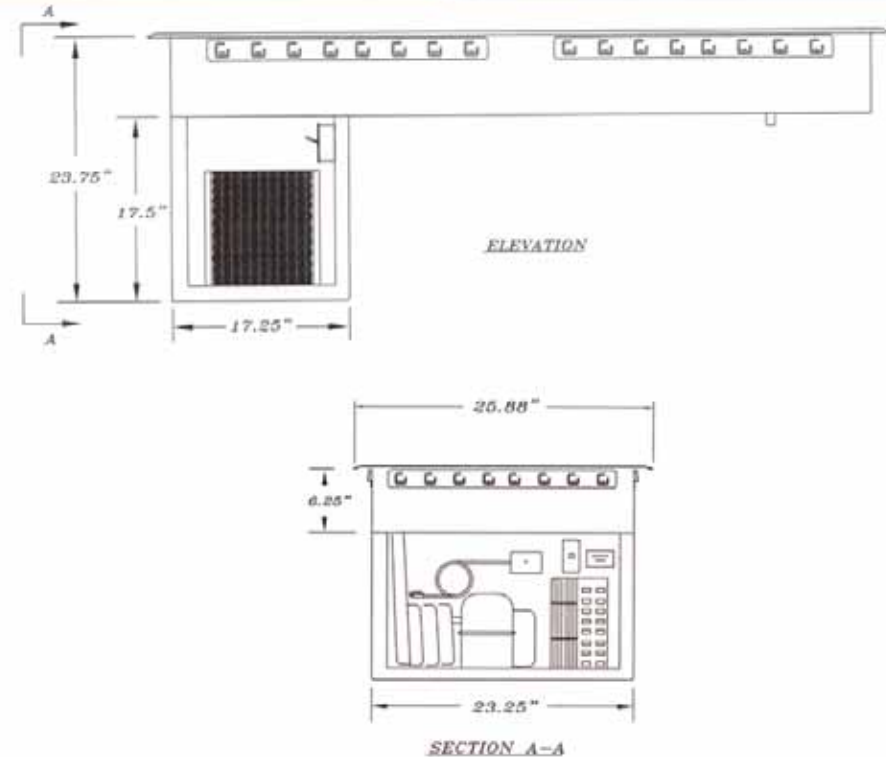

Naval Shipboard Models Available.

# COSPOLICH

Post Office Box 1206 • Destrehan, Louisiana 70047  
 Toll Free: 800-423-7761 • Local: 985-725-0222 • FAX: 985-725-1564