

COSPOLICH

MODEL NUMBERS:

HP1H-2M-SN-MLR

HP1V-2M-SN-MLR

HP2H-2M-SN-MLR

HP2V-2M-SN-MLR



HP2H-2M-SN-MLR

HOLDING/PROOFING CABINETS

APPLICATION

To satisfy a need for high quality, shipboard hatchable grade, heated products, Cospolich has introduced their "HP" class of horizontal and vertical modular Hot Hold/Proofing cabinets

These fully insulated cabinets are designed, in the Hold Mode, to keep prepared food at correct serving temperatures. In the Proofing Mode, humidity is introduced into the heated compartment to generate quantities of evenly raised dough.

Air circulation is designed to give even temperature ranges throughout the compartment, whether in the Proofing or Holding modes.

Angle tray slides accommodate either 18" x 26" or 12" x 20" pans.

In the Hold Mode, the 2000 Watt heater holds foods at up to 180° F (82° C). In the Proofing Mode, the separate 1850 Watt heating element will produce temperatures ranging from 80° F (26.5° C) to 95° F (35° C), with relative humidity of 95%.

Exterior front mounted controls are easily adjustable and accessible, making adjustments, without interrupting process, possible.

MODULAR

The modular construction of these shipboard hatchable units, which can be disassembled, brought into the vessel and reassembled in place, has virtually eliminated the need for hull cuts and hatch modifications.

Exterior and interior are constructed of 304 stainless steel, offering corrosion resistance and ease of cleaning. Coved corners on interior of unit aid in cleaning and reduce possibility of food or grease buildup.

Paddle type, positive latching, with cylinder lock is provided on each door.

Stainless steel base with front drip trough.

OPTIONAL FOUNDATION

Should the application require it, a foundation can be

furnished. The foundation can be fabricated of either 7 Ga. type 316 stainless steel or mild steel with corrosion resistant coating. The foundation is secured to the deck, and the Hot Holding/Proofing cabinet is attached to the foundation with rear clips and front bolts.

OPTIONS

- Digital Thermometer
- 208 or 240 Volt service
- Chart recorder
- Tempered glass doors
- Padlockable hasp
- Casters
- Adjustable stainless steel legs
- Conventional construction
- Vertical or horizontal cabinets
- Stainless Steel or Mild Steel foundation

FEATURES

- Fully insulated cabinet
- 304 Stainless Steel construction
- Front mounted control panel
- Heavy duty heating elements
- Lockable positive latching



www.cospolich.com

**CONTACT FACTORY
FOR YOUR
SPECIFIC CAPACITY
REQUIREMENTS**

**2M
SERIES**

Quality & Innovation Since 1937

MODULAR HOLDING/PROOFING CABINETS

MODULAR HOLDING/PROOFING CABINETS

MODEL NUMBERS:
 HP1H-2M-SN-MLR
 HP2H-2M-SN-MLR
 HP1V-2M-SN-MLR
 HP2V-2M-SN-MLR

DIMENSIONAL DATA

	HP1H-2M-SN-MLR	HP2H-2M-SN-MLR	HP1V-2M-SN-MLR	HP2V-2M-SN-MLR
Width Overall (in / mm)	28 / 711	46 / 1168	28 / 711	46 / 1168
Depth Overall (in / mm)	30 / 762	30 / 762	30 / 762	30 / 762
Height Overall (in / mm)	30 / 762	30 / 762	60 / 1524	60 / 1524
Depth with Door Open (in / mm)	50.5 / 1283	50.5 / 1283	50.5 / 1283	50.5 / 1283
Number of Doors	1	2	2	4
Weight (lbs / kg)	243 / 109	347 / 156	510 / 229	729 / 328

ELECTRICAL DATA


Voltage	115	115	115	115
Total Amperes	16	16	16	16 (2)
Total Wattage (Proof)	1850	1850	1850	1850 (2)
Total Wattage (Hold)	2000	2000	2000	2000 (2)

SHIPPING DATA


Width-Crated (in / mm)	34 / 864	52 / 1321	34 / 864	52 / 1321
Depth-Crated (in / mm)	36 / 914	36 / 914	36 / 914	36 / 914
Height-Crated (in / mm)	36 / 914	36 / 914	66 / 1676	66 / 1676
Weight-Crated (lbs / kg)	386 / 174	550 / 247	809 / 364	1157 / 520
Volume-Crated (cu ft / ltr)	56 / 736	39 / 1104	47 / 1331	72 / 2039

MODEL SHOWN:

HP2H-2M-SN-MLR

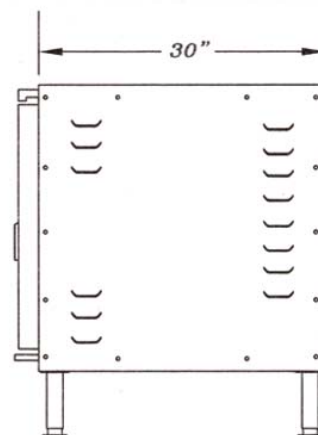

END VIEW

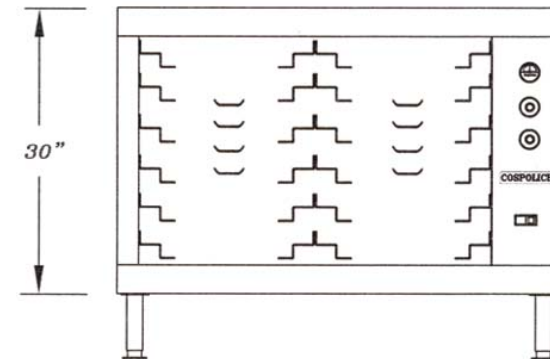

ELEVATION (Without doors)

**THIS UNIT IS
 AVAILABLE IN
 OUR CONVENTIONAL
 CONSTRUCTION**



COMPONENTS	HP1H			HP2H			HP1V			HP2V		
	W	D	H	W	D	H	W	D	H	W	D	H
Bottom (in)	28	30	4.5	46	30	4.5	28	30	4.5	46	30	4.5
Control End (in)	8	30	28	8	30	28	8	30	53	8	30	53
Back (in)	17	2.25	28	35	2.25	28	17	2.25	53	35	2.25	53
Left End (in)	28	3.25	28	28	3.25	28	28	3.25	53	28	3.25	53
Partition (in)							28	30	5	46	30	5
Top (in)	28	30	2.25	46	30	2.25	28	30	2.25	46	30	2.25
Doors (in)	22	2	25	20	2	25	22	2	25	20	2	25

www.cospolich.com

COSPOLICH

Post Office Box 1206 • Destrehan, Louisiana 70047

Toll Free: 800-423-7761 • Local: 985-725-0222 • FAX: 985-725-1564