

# COSPOLICH

2M  
SERIES

REFRIGERATORS

## MODEL NUMBERS:

R22-2M-S     R22-2M-SN MIL SPEC  
R25-2M-S     R25-2M-SN MIL SPEC  
R30-2M-S     R30-2M-SN MIL SPEC

### CABINET CONSTRUCTION

Exterior and interior of all standard cabinets, including front, sides, doors and louvered grill are constructed of heavy gauge, type 304 stainless steel.

Special attention was taken in engineering the doors of the Cospolich cabinet. The door unit was designed to withstand the continuous use and abuse that is common in all food service applications.

Resilient vinyl gaskets which are pre-formed in frames with welded corners, greatly inhibit bacterial growth and are easily replaceable.

Heaters, which are concealed under the thermal breaker strip around the door perimeter, prevent condensation.

Interior lighting, a standard item in all refrigerator compartments, is activated by the door opening.

### INSTALLATION

As an aid to installation, a foundation for securing the cabinet to the deck is an available option. Installation instructions and a manual are furnished with the unit.

### HARDWARE

Positive latches with magnetic back-up are included on all standard cabinets to assure positive latching and sealing. Incorporated into the latch is a replaceable, keyed cylinder lock.

Heavy duty, adjustable, chrome plated hinges are provided on all standard cabinets. Also available, at no extra cost, are 180 degrees self-closing, cam-lift hinges with stay-open feature at 93 degrees.

Cabinet body and doors are insulated with foamed-in-place polyurethane foam, providing for excellent rigidity and the best insulating properties in the industry.

### REFRIGERATION SYSTEM

All components of the refrigeration system, with the exception of the evaporator, are bottom mounted on a heavy duty base frame behind a louvered grill which is easily removable without the use of tools. The condensing unit is mounted on a slide out rail for ease in cleaning and servicing.

All evaporator coils are copper tube, and all AC voltage models have forced-air ventilation. The refrigerant flow is monitored by an expansion valve for effective cooling. A condensate evaporator is provided, thus eliminating the need for additional plumbing.



R30-2M-SN

Temperature of the cabinet is factory adjusted, and the controls, along with off/on switch are located in the condensing unit area.

### SHELVING

Standard interior shelving consists of heavy-duty epoxy-coated steel wire with front rail. Each shelf is adjustable in one-inch increments. Stainless steel shelving and brackets are also available.

### SERVICE AID

An optional service kit, including spare parts and installation instructions, is available for each model.

### U.L. and U.S.P.H.

This equipment is listed by Underwriters Laboratories, Inc. for safety and sanitation and is built according to standards as set forth by the U.S. Public Health Service.

## THIS UNIT AVAILABLE IN OUR SPECIAL MODULAR CONSTRUCTION

### FEATURES

- Stainless steel interior and exterior (exposed)
- Oversized refrigeration system
- Anti-condensate door heaters
- Heavy-duty chrome-plated hardware
- Automatic activated interior lighting
- Door with adjustable alignment
- Epoxy coated adjustable shelving with front rail
- Removable grill
- Polyurethane insulation
- Slide-out condensing unit
- Resilient gaskets
- Exterior dial thermometer
- Condensate Evaporator Pan



### OPTIONS

- Food files
- Special dimensions
- Special voltage and currents
- All stainless steel exterior
- Mil-Spec units
- Heavy-duty adjustable legs
- Spring closing hinges
- Aluminum construction for weight sensitive applications
- Fresh and sea water cooled condensing units
- Stainless steel adjustable shelving with front rail
- Foundation
- Spare Parts Kit
- Front venting

[www.cospolich.com](http://www.cospolich.com)

Quality & Innovation Since 1937

# REFRIGERATORS

# GENERATORS

**MODEL NUMBERS:**  
**R22-2M-S**  
**R22-2M-SN MIL SPEC**  
**R25-2M-S**  
**R25-2M-SN MIL SPEC**  
**R30-2M-S**  
**R30-2M-SN MIL SPEC**

## DIMENSIONAL DATA

	R22-2M-S (SN)	R25-2M-S (SN)	R30-2M-S (SN)
Net Capacity (cu ft / ltr)	20 / 566	28 / 793	33 / 935
Width Overall (in / mm)	36 / 914	48 / 1219	48 / 1219
Depth Overall (in / mm)	28 / 711	28 / 711	32 / 813
Height Overall (in / mm)	72 / 1829	72 / 1829	72 / 1829
Interior Width (in / mm)	31 / 787	43 / 1092	43 / 1092
Interior Depth (in / mm)	22.5 / 572	22.5 / 572	26.5 / 673
Interior Height (in / mm)	50.25 / 1276	50.25 / 1276	50.25 / 1276
Depth Over Body (in / mm)	26 / 660	26 / 660	30 / 762
OA Depth with Door Open 90° (in / mm)	42 / 1067	49 / 1245	53 / 1346
Clear Door Width (in / mm)	13 / 330	19 / 483	19 / 483
Clear Half-Door Height (in / mm)	-----	-----	-----
Clear Full Door Height (in / mm)	48.25 / 1226	48.25 / 1226	48.25 / 1226
Number of Doors	2	2	2
Number of Shelves	6	6	6
Shelf Area (sq ft / sq m.)	19 / 2	26 / 2	31 / 3
Weight (lbs / kg)	400 / 180	450 / 204	500 / 225

## ELECTRICAL DATA

Voltage	115	115	115
Total Amperes	8	8.5	8.5

## REFRIGERATION DATA


Compressor H.P.	1/3	1/3	1/3
BTU / HR - KCAL / HR	1955 / 493	2000 / 504	2425 / 611

## SHIPPING DATA


Width-Crated (in / mm)	38 / 965	50 / 1270	50 / 1270
Depth-Crated (in / mm)	30 / 762	30 / 762	36 / 914
Height-Crated (in / mm)	76 / 1930	76 / 1930	76 / 1930
Weight-Crated (lbs / kg)	480 / 218	542 / 245	596 / 271
Volume-Crated (cu ft / ltr)	50 / 1416	66 / 1869	79 / 2237

MODEL SHOWN  
**R30-2M-S (SN)**

Naval Shipboard Models Available.

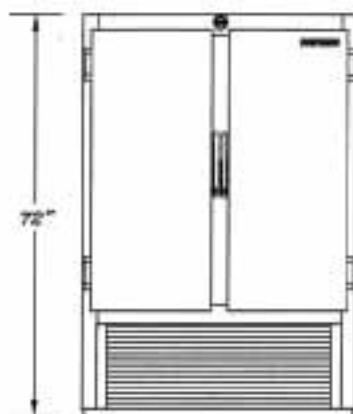

ELEVATION



HORIZONTAL SECTION



VERTICAL SECTION

# COSPOLICH

[www.cospolich.com](http://www.cospolich.com)

Post Office Box 1206 • Destrehan, Louisiana 70047

Toll Free: 800-423-7761 • Local: 985-725-0222 • FAX: 985-725-1564