

Shipboard Wardroom Mess Serving Line Technical Manual

Installation, Operation, and Maintenance Instructions Models:

CVN77SL8-93584



Cospolich, Inc. - PO Box 1206, Destrehan, LA 70047, (800) 423-7761 — www.cospolich.com September 2013

Table of Contents

	List of Illustrations	3		6.2.2 Replacement of Door Latch	20
	List of Tables	4		6.2.3 Replacement of Breaker	21
Chapter 1	General Information	5-8		6.2.4 Replacement of Distribution Block	21
1.1	Introduction	5		6.2.5 Replacement of Thermostat	21
1.2	Scope of the Manual	5	Chapter 7	Parts List	22
1.3	Equipment Description	5		Introduction	
1.4	Equipment Supplied	5			22
Table A	Leading Particulars	6		Source Codes	22
	Illustrations 1.A—1.B	7-8	Table H	Source Codes	22
Chapter 2	Operation	9	Table I	Parts List CVN77SL8-93584	23-24
2.1	Introduction	9		Illustrations 7.A—7.B Controls & Electrical	25
2.2	Controls and Indicators	9		Illustrations 7.C—7.D Electrical Assemblies	26
Table B	Controls and Indicators	9		Illustrations 7.E—7.F Ice Cream Drop-In	27
	Illustrations 2.A—2.B	10		Illustrations 7.G—7.H Cabinet & Door Detail	28
2.3	Start Up Procedure	11		Illustrations 7.1—7.J Dual Serving Module	29
Table C	Start Up Procedure	11			
2.4	Dual Serving Module Operating Instructions	12		Illustrations 7.K—7.L Tray Rail & Leg Detail	30
	Illustrations 2.C—2.D	12		Illustrations 7.M—7.N Main Unit Front/Rear	31
	Shut Down Procedure for Short Term	13	Chapter 8	Installation	32
	Shut Down Procedure for Short Term	13	8.1	Unpacking	32
	Cleaning Instructions	13	8.2	Installation	32
	Extended Period Inactivity	14	Chapter 9	Modular Installation	33
	Shutdown for Extended Period	14	9.1	Introduction	33
Chapter 3	Functional Description	15	9.2	Installation. Skill Level	33
	System Description System Operation	15 15	9.3	Tools	33
Chapter 4	Scheduled Maintenance	16-18		Disassembly	33
l -	Introduction	16			
	Preventive Maintenance Index	16		Electrical & Mechanical	34-36
		16	10.1	Introduction	34
4.4	Maintenance Procedures	16		Illustrations 10.A—10.B	35-36
	A. Monthly Maintenance Requirements	16	Chapter 11	Warranty	37
	B. Bi-Monthly Maintenance Requirements	17	Appendix 1	Revision History	38
	C. Annual Maintenance Requirements	17			
	D. 3-Year Maintenance Requirements	17			
Table F	Preventive Maintenance	18			
Chapter 5	Troubleshooting	19			
Table G	Mechanical & Electrical	19			
Chapter 6	Corrective Maintenance	20			
6.1	Introduction	20			
6.2	Repair Procedure	20			
	6.2.1 Replacement of Door Ventilation Fan Motor	20			

List of Illustrations

Illustration	Title	Pg.
1.A	General Arrangement Drawing, 93584.2-GA-1	7
1.B	Isometric Drawing-Dual Flex Module	8
2.A	Dual Serving Module On/Off/Mode Controller	10
2.B	Breaker Box, Distribution Block Assembly, & Rear Distribution Panel	10
2.C	Dual Serving Module Docked in Flex Serving Line Cabinet	12
2.D	Dual Serving Module Plugged Into Rear Distribution Panel	12
7.A	Distribution Block Assembly, Breaker Box, & Rear Distribution Panel	25
7.B	Fan Doors Interior Detail	25
7.C	Dual Breaker Box & Distribution Block Exterior Detail	26
7.D	Dual Breaker Box & Distribution Block Interior Detail	26
7.E	Ice Cream Drop-In Detail	27
7.F	Ice Cream Drop-In Detail	27
7.G	Right Cabinet Door Detail	28
7.H	Left Cabinet Door Detail	28
7.1	Dual Serving Module Front Detail	29
7.J	Dual Serving Module Rear Detail	29
7.K	Tray Rail Detail	30
7.L	Leg Detail	30
7.M	Wardroom Mess Serving Line Front Detail	31
7.N	Wardroom Mess Serving Line Rear Detail	31
10.A	Electrical Schematic—Wardroom Mess Serving Line	35
10.B	Electrical Schematic—Dual Serving Module	36

List of Tables

Table	Title	Page
Α.	Leading Particulars	6
B.	Controls and Indicators	9
C.	Start Up Procedure	11
D.	Shut Down Procedure for Short Term	13
E.	Shut Down Procedure for Extended Period	14
F.	Preventive Maintenance Action Index	18
G.	Mechanical and Electrical Troubleshooting Guide	19
H.	Source Codes	22
I.	Parts List - CVN77SL8-93584	23-24

Chapter 1—General Information

1.1 Introduction

This technical manual provides information on the installation, operation, maintenance, and inspection of this unit manufactured by **Cospolich Inc.**, Destrehan, Louisiana. A complete parts breakdown is provided in Chapter 7.

1.2 Scope of the Manual

This technical manual provides information for installation, operating, preventative maintenance, and service instructions, including applicable drawings and figures of the equipment.

1.3 Equipment Description

The unit consists of the following parts:

- A. <u>Storage Compartment</u> The storage compartment is clear storage area.
- B. <u>Door(s)</u> Access to the storage compartment is through hingemounted door(s).
- C. <u>Flex Serving Modules</u>—The flex serving modules are located on the top of the cabinet. Each well is self-contained, removable, and has its own individual on/off/mode control switch.
- D. <u>Cabinet</u> The cabinet is the enclosure in which all of the above items are housed.
- E. <u>Control Panel Assembly</u>—The control panel assembly is located inside the cabinet on one end and is contained inside of four NEMA-4 plastic control boxes, two for the breakers and two for the distribution blocks


1.4 Equipment Supplied

The unit is shipped from the factory fully assembled, palletized and crated to minimize the possibility of damage in shipping and storage.


Table A—Leading Particulars

MANUFACTURER:	Cospolich Inc. Destrehan, Louisiana 70047		
TYPE:	Shipboard Wardroom Mess Serving Line CVN77SL8-93584		
PURPOSE:	Hot/Cold Holding/Serving of Food Items/ Perishables		
ELECTRICAL REQUIREMENTS: (Per Module)	Breaker Required: 15 Amp		
CHILL MODE: (Per Module)	Power Supply - 115 Volt AC, 60 Hz, 1 Phase Amp draw - Maximum Power Demand: 2 Amps Watts - 230 Watts		
HEAT MODE: (Per Module)	Power Supply - 115 Volt AC, 60 Hz, 1 Phase Amp draw - Maximum Power Demand: 7.2 Amps Watts - 900 Watts		
REFRIGERANT:	134A		
DRAIN:	Not Required		
DIMENSIONS:	202" WIDE X 30" LONG X 36" HIGH		

Illustration 1.A - General Arrangement Drawing

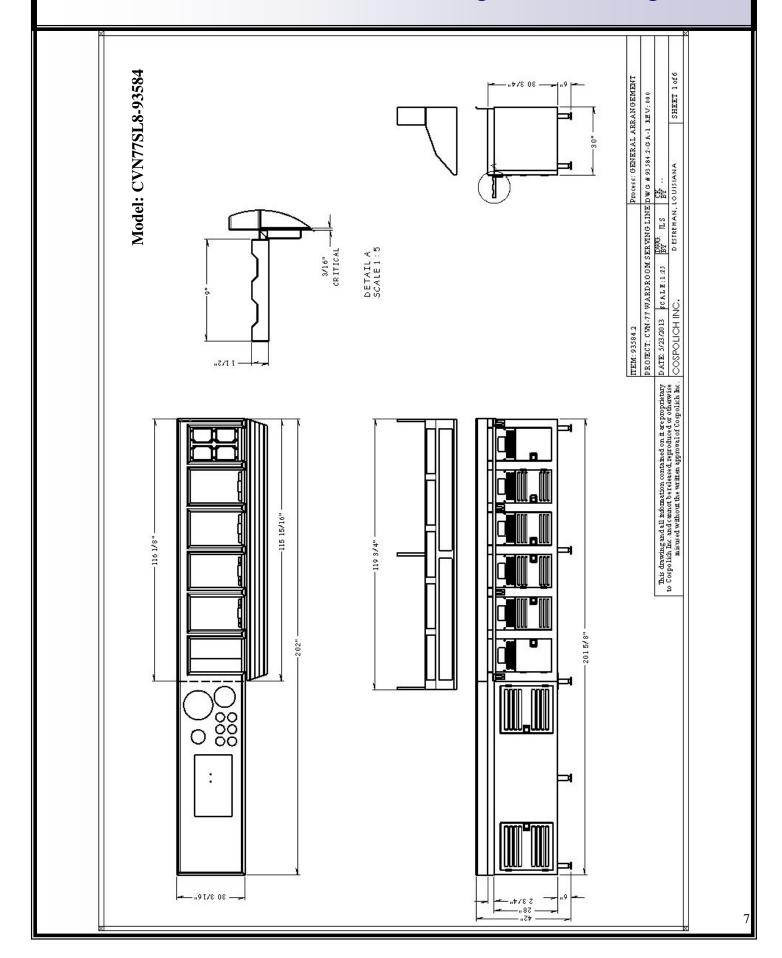

<u>Illustration 1.B—Isometric Drawing-Dual Flex Module</u>

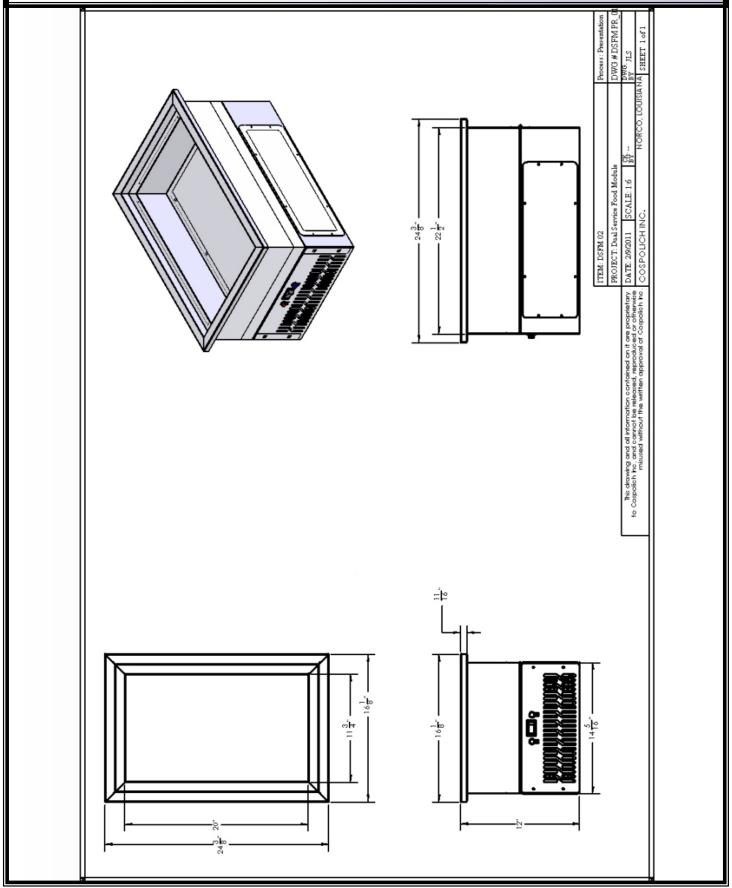

Chapter 2—Operation

2.1 Introduction

This model is a heavy-duty piece of food service equipment designed for intermittent use. Each individual serving module incorporates electronic controls to regulate the cycling of the heated/chilled wells.

2.2 Table B—Controls and Indicators

Name	Туре	Function
On/Off/Mode Switch (Part of Dual Serving Module)	Toggle Switch	Power Control, terminates all electrical into and past the supply cord, switches module mode from hot to off to cold depending on need
Electronic Controller (Part of Dual Serving Module)	Push Button Electronic	Cycles heating element and controls temperature
Electrical Breaker	Electrical Interrupt	Breaks/Connect power to main circuit

<u>Illustrations 2.A, 2.B—</u> <u>Controls, Indicators, & Electrical</u>



Illustration 2.A: Dual Serving Module On/Off/Mode Switch

> Illustration 2.B: Breaker Box, Distribution Block Box, Rear Distribution Panel



2.3 Start Up Procedure

The system is completely factory assembled and ready for operation. To energize the system, it is only necessary to find the power supply cord and connect it to a proper 115V power source. Once the supply cord has been connected to a power source, the unit can be started by first checking that all breakers are in the proper position. Each module can be set to the desired mode (Heat/Off/Chill) by flipping the power control toggle switch to the appropriate position.

Table C—Start Up Procedure

	Operation	Results
1.	Activate system by connecting electrical service cord to power supply.	This brings power to the control.
2.	Check all breakers inside the breaker box are in the correct "ON" position	This brings power to the controls.
3.	Place power switch to "Heat/Off/Chill" position	The heating element or compressor will become energized

2.4 Dual Serving Module Operating Instructions

- 1. Dual serving modules (DFM-N) can be placed individually into the four (4) ports of the wardroom mess serving line cabinet.
- 2. Once placed into the cabinet, the power cord for each module must be plugged into the corresponding outlet along the rear distribution panel inside the cabinet.
- 3. The front door can then be closed to each individual port and the access panels placed back into position.
- 4. In order to energize the entire cabinet and all the docked dual serving modules, all the breakers contained within the large control panel box on the inner left wall of the cabinet must be in the "ON" position. Each well can individually controlled from this breaker panel.
- 5. Operation of each dual serving module is explained in further detail in the "DFM-N Dual Serving Module" Technical Manual.

Illustration 2.C: Dual Serving Module Docked in Flex Serving Line Cabinet



Illustration 2.D:
Dual Serving Module Power Cord
Plugged into Rear Distribution Panel of
Flex Serving Line Cabinet



2.5 Shut Down Procedure for Short Term

To shut down, turn the power switch for each module to the center "OFF" position.

	Table D—Shut Down Procedure for Short Term			
	Operation	Results		
1.		Once the system is de-energized the cabinet has no power and the modules will no longer operate.		



WARNING: PRIOR TO CLEANING ANY OF THE UNIT, THE SYSTEM SHOULD BE DEACTIVATED BY DISCONNECTING THE POWER SUPPLY.

2.6 Cleaning Instructions

NOTE: Cleaning is the most important thing that can be done to ensure optimum performance and reliability from the Wardroom Mess Serving Line Unit. All accessible stainless steel surfaces should be cleaned after every use.

- 1. It is necessary that the power source be turned off.
- 2. Remove all insets, pans, and/or inserts.
- 3. Wipe entire unit using a clean cloth or sponge with a mild detergent.



<u>WARNING:</u> DO NOT SPLASH OR POUR WATER ONTO THE EVAPORATOR ASSEMBLY, CONTROL PANEL, CONDENSING UNIT AND/OR WIRING.



<u>CAUTION:</u> POSSIBLE SHOCK HAZARD MAY RESULT AND UNIT MAY BE DAMAGED SHOULD ELECTRICAL COMPONENTS BECOME WET.

4. The controls should be free of moisture, dust, debris, grease, etc. at all times.

- 5. A plastic scouring pad may be used in the well to remove any hardened food particles.
- 6. When cleaning is completed, rinse the well thoroughly with a solution of vinegar and water to neutralize all detergent/cleaner residue.

Important: It is not recommended to use any strong or caustic cleaners on the Wardroom Mess Serving Line. Do not allow ammonia to stand in the interior of the unit. Make certain to rinse thoroughly to remove all residue. Failing to do so may cause damage or corrosion to the unit.

2.7 Preparation for an Extended Period of Inactivity

This unit is designed for periodic use. For extended shut down the electrical should be disconnected and the interior cleaned.

Table E-Shut Down Procedure for Extended Period

	Operation	Results
1.	Disconnect Power Supply	De-energizes entire unit
2.	Clean all modules	Follow cleaning instructions
3.	Clean and wipe dry the storage compartment	Will reduce any odor build-up during shut- down

Chapter 3—Functional Description

3.1 System Description

The unit is a self-contained, automatically controlled, continuous duty hot/cold food serving system. It is designed with the intent and purpose of holding and serving hot/cold food items and functioning as a working surface from which hot/cold foods may be prepared and served.

The flex serving modules are each individually controlled and may be set in either a "Heat" or "Chill" Mode.

The equipment is comprised of the following two basic compartment assemblies:

- 1. <u>Dual Serving Modules</u>—These are the individual warming/chilling compartments on the top of the service counter.
- 2. <u>Storage Compartment</u>—This area is open storage space for dry goods and general storage. It also contains the electrical breaker box, terminal box, and rear power distribution panel.

3.2 System Operation

The design of the wardroom mess serving line focuses primarily on the safe storage of food while waiting to be served. In its engineering, considerable attention was placed on both its function as well as its serviceability.

The system is a pre-wired, closed-loop system with removable individual dual serving modules.

Chapter 4—Scheduled Maintenance

4.1 Introduction

To insure the longest and most trouble free operation, a thorough periodic maintenance schedule is required. The maintenance system should be aimed at maximizing the efficient utilization of maintenance personnel, minimizing down time, and providing the orderly acquisition of spare parts support.

The Cospolich Wardroom Mess Serving Line will generally be in operation in a facility or onboard a vessel where scheduled maintenance is performed according to Maintenance Index Plans. This unit requires regular maintenance. This chapter is intended as an alternative to any standard maintenance program that may pre-exist. The preventative maintenance schedule is based upon similar maintenance requirements for commercial refrigeration equipment.

4.2 Preventive Maintenance Action Index

If there is not a maintenance index plan, we have formulated our schedule for periodic maintenance in Table F.

4.3 Preparation for Maintenance

Since many areas affected in the maintenance schedule are electrically supplies, it may be necessary to de-energize the system when making these inspections.

4.4 Maintenance

A. Monthly Maintenance

- 1. The unit should first be de-energized by switching the toggle switch for each module to the center "OFF" position. All six breakers in the breaker panel should then be moved to the "OFF" position.
- 2. Follow the cleaning instructions in Section 2.6 to clean each of the individual modules and the cabinet assembly.

B. Bi-Monthly Maintenance

- 1. Using a mild, non-abrasive detergent and water, wipe the cabinet exterior, paying careful attention to wipe the cabinet in the direction of the stainless steel grain texture.
- 2. Check the operation of each module to make certain they are performing accurately and adequately.

C. Annual Maintenance

- 1. Visually inspect the outer panels, doors, and other components of the cabinet. Check screws, mounting bolts, etc. to make certain they are tight and in place.
- 2. Inspect all electrical connections to make certain that there is a good contact and that wires are neither weak nor frayed.
- 3. Inspect the overall integrity of the cabinet.

D. 3-Year Frequency Maintenance

- 1. Using a mild, non-abrasive detergent and water, wipe the cabinet exterior, paying careful attention to wipe the cabinet in the direction of the stainless steel grain texture.
- 2. Check the operation of each module to make certain they are performing accurately and adequately.
- 3. Inspect the operation of the door latch assemblies. Check for signs of wear, loose screws, or mechanical failure.
- 4. Inspect the operation of the door hinges.

Table F—Preventive Maintenance Action Index

	Frequency	Description	
1.	Monthly	A. De-energize system and clean the modules.	
2.	Bi-Monthly	A. Clean interior and exterior of cabinet with mild detergent and water, dry thoroughlyB. Check the performance of the modules	
3.	Annually	 A. Visually inspect the outer panels and components of the cabinet B. Inspect electrical connections to make certain that there is a good contact and that wires are neither weakened or frayed. C. Check the integrity of the cabinet 	
4.	3-Year	 A. Clean interior and exterior of cabinet with mild detergent and water, dry thoroughly B. Check the performance of the modules C. Inspect door latches and hinges. 	

Chapter 5—Troubleshooting

This chapter will assist in a systematic check of components in determining any cause of equipment failure.

It will be necessary that the individual involved in the troubleshooting operation be familiar with the function of the equipment as described in Chapter 3.

The following table lists the most common symptoms that may be experienced and the recommended corrective action. The tables are separated into electrical maintenance, mechanical maintenance, and operators' actions.

Table G—Mechanical and Electrical Troubleshooting Guide

Symptom	Possible Failure	Remedy	
Unit does not operate	A. Control failure	A. Adjust control or replace	
	B. Incorrect voltage B. Correct		
	C. Failed element	C. Replace	
	D. Doesn't warm properly	D. Check electrical switch	
Unit runs continuously	A. Control failure	A. Adjust control or replace	

Chapter 6—Corrective Maintenance

6.1 Introduction

This chapter focuses on the instruction needed in the removal and replacement of certain components. We will also address the repair of components not listed under the schedule maintenance index covered in Chapter 4.

The components that we address are considered acceptable for repair using standard procedures that we will detail. The level of skills required to perform the service or repair will vary. Some may require specific training. It is up to the individual and /or his supervisor to determine their capability to undertake the particular task of service or repair. It is also important to know that any procedure requiring the handling of electrical components and appliances. The service or repair items are limited to those listed in Chapter 7.

WARNING: PRIOR TO PERFORMING ANY WORK ON THE SYSTEM, IT IS RE-QUIRED THAT THE UNIT BE DE-ENERGIZED.

6.2 Repair Procedure

6.2.1 Replacement Door Ventilation Fan Motor (Part #: RWEM26)

- 1. Disconnect power supply to the unit.
- 2. Open door to the unit. Unscrew the fasteners securing the fan motor. Disconnect wiring harness to the fan motor.
- 4. Reverse the process to install new fan motor.

6.2.2 Replacement of Door Latch (Part #: HXLH33)

- 1. Open door. Remove fasteners securing small circular access cover to interior rear surface of the door.
- 2. Remove fasteners on rear of latch. Remove old latch.
- 3. Reverse the process to install new door latch.

Chapter 6—Corrective Maintenance

6.2.3 Replacement of Breaker (Part #: PCCC55)

- 1. Disconnect power supply to the unit.
- 2. Open door to the unit. Open the plastic enclosure box containing the failed breaker.
- 3. Disconnect wires to the failed breaker.
- 4. Remove failed breaker from the din rail.
- 4. Reverse the process to install new breaker.

6.2.4 Replacement of Distribution Block (Part #: RWDB01)

- 1. Disconnect power supply to the unit.
- 2. Open door to the unit. Open the plastic enclosure box containing the failed distribution block.
- 3. Disconnect wires to the failed distribution block.
- 4. Remove failed distribution block.
- 5. Reverse the process to install the new distribution block.

6.2.5 Replacement of Thermostat (Part #: RWTT01)

- 1. Disconnect power supply to the unit.
- 2. Open door to the unit.
- 3. Disconnect wiring harness to the failed thermostat.
- 4. Remove failed thermostat.
- 5. Reverse the process to install the new thermostat.

Chapter 7—Parts List

7.1 Introduction

This section of the manual contains lists of replaceable parts. Each of the tables contain a list of removable parts associated with an assembly of the cabinet. No parts identification has been provided for details of permanently assembled items or those items that are not suitable for field repair.

7.2 Source Codes

The sources for some items are shown in the part tabulation. Where no individual source code is listed, the part is available through Cospolich Inc., PO Box 1206, Destrehan, LA 70047 (Fed. Mfg. Code #66682).

Table H—Source Codes

Code Number	Name	Address	
14852	Bohn Heat Transfer	Danville, IL 61834	
32761	Kason Industries	Newnan, GA 30265	
50992	Ranco Controls	Plain City, OH 43064	
78462	Sporlan Valve	Washington, MO 63090	
14569	Copeland Corporation	Sidney, OH 45365	
17529	Oasis	Vacaville, CA 95687	
59431	Tecumseh Products	Ann Arbor, MI 48108	
49048	Miljoco Corporation	Mt. Clemens, MI 48043	
42020	Nashville Wire Products	White Bluff, TN 37187	
79264	Jean's Extrusions, Inc.	Salem, IN 47167	
2K223	Refrigeration Hardware	Grand Junction, CO 81505	
09966	Instrument Systems Corp.	Jericho, NY 11753	
60886	Idec Corporation	Sunnyvale, CA 94089	
19220	Eberhard, Inc.	Strongsville, OH 44149	
66682	Cospolich, Inc.	Destrehan, LA 70047	

Table I—Parts List for CVN77SL8-93584

	ITEM	COCD#	MEC#	Vanday	OTV	U/M
	ITEM	COSP#	MFG#	Vendor	QTY	U/IVI
1	LEFT FEMALE HINGE	HXHE23F	SS09203018LF-104	HOFFMAN	8	EA
2	LEFT MALE HINGE	HXHE23M	SS09203018LM-106	HOFFMAN	8	EA
3	RIGHT FEMALE HINGE	HXHE24F	SS09203018RF-105	HOFFMAN	8	EA
4	RIGHT MALE HINGE	HXHE24M	SS09203018RM-107	HOFFMAN	8	EA
5	DOOR LATCH	HXLH33	64-21-10	SOUTHCO	8	EA
6	DUAL SERVING MODULE	DFM-N*	COSPOLICH	COSPOLICH	6	EA
7	DUAL BREAKER BOX ASSEMBLY	RCTL62	RCTL62	COSPOLICH	2	EA
8	8" X 6" X 4" ELECTRICAL ENCLOSURE	LENC09	HFFM-A864CHQRFG	NULITE	4	EA
9	8" X 6" X 4" BACK PANEL	LENC09B	MP806S	NULITE	4	EA
10	FEMALE OUTLET	LLTC13	410316	WALTHER	6	EA
11	MALE PLUG	LLTC14	216316	WALTER	6	EA
12	LIQUID TIGHT CONNECTOR	LLTC06	22534	MOTORS & CONTROLS	16	EA
13	15 AMP, 2 POLE BREAKER	PCCC55	S202-B16	MG	6	EA
14	GROUND TERMINAL BLOCK	PCTT008	57.506.9055.0	MG	4	EA
15	DISTRIBUTION BLOCK	RWDB01	1323580	MG	2	EA
16	DIN RAIL	PCTR001	BND1000	MG	2	FT
17	DISTRIBUTION BLOCK ASSEMBLY	RCTL58	RCTL58	COSPOLICH	2	EA
18	BUS BAR ASSEMBLY	RCTL68	RCTL68	COSPOLICH	1	EA
19	SOLID LEFT DOOR	DFSL6WL	DFSL6WL	COSPOLICH	1	EA
20	THERMOSTAT	RWTT01	T6054A-1005/U	HONEYWELL	3	EA
21	SOLID RIGHT DOOR	DFSL6WR	DFSL6WR	COSPOLICH	1	EA
22	ADJUSTABLE LEG	HLEG63	HLEG63	KASON	10	EA
23	AXIAL FAN MOTOR	RWEM26	FA1238S11T7-52	COOLTRON	21	EA
24	SMALL LEFT DOOR W/FANS	DFSL6WLF	DFSL6WLF	COSPOLICH	2	EA
25	SMALL RIGHT DOOR W/ FANS	DFSL6WRF	DFSL6WRF	COSPOLICH	2	EA

Table I—Parts List for CVN77SL8-93584

	ITEM	COSP#	MFG#	Vendor	QTY	U/M
26	SOLID RIBBED TRAY RAIL	FTSM(93584)	FTSM(93584)	COSPOLICH	1	EA
27	TRAY RAIL BRACKET	HTSBF07	HTSBF07	COSPOLICH	4	EA
28	MODULE ACCESS PANEL	FSL6WMAP01	FSL6WMAP01	COSPOLICH	6	EA
29	LARGE LEFT DOOR W/FANS	DFSL6WLFL	DFSL6WLFL	COSPOLICH	1	EA
30	LARGE RIGHT DOOR W/FANS	DFSL6WRFL	DFSL6WRFL	COSPOLICH	1	EA
31	PLATE DISPENSER, 10"	HXDIS-1013***	DIS-1013	DELFIELD	1	EA
32	DISH DISPENSER, 6.5"	HXDIS-650***	DIS-650	DELFIELD	1	EA
33	WHITE UTENSIL HOLDER	UTHL01 ***	UTHL01	SOUTHERN COMMERCIAL	6	EA
34	DIP WELL, 6"	DIPWELL01	DIPWELL01	DIPWELL CO.	1	EA
35	ICE CREAM DROP-IN FREEZER	ICDCDI5-2M-SNM**	ICDCDI5-2M-SNM	COSPOLICH	1	EA

^{*}Complete Parts List for the Dual Serving Module (DFM-N) is contained within the "DFM-N Dual Serving Module" Technical Manual. This Parts List is for the Wardroom Mess Serving Line only.

^{**}Complete Parts List for the Ice Cream Drop-In Freezer (ICDCDI5-2M-SNM) is contained within the "ICDCDI5-2M-SNM" Technical Manual. This Parts List is for the Wardroom Mess Serving Line only.

^{***}Not shown in illustrations

<u>Illustrations 7.A & 7.B—</u> <u>Controls & Electrical</u>

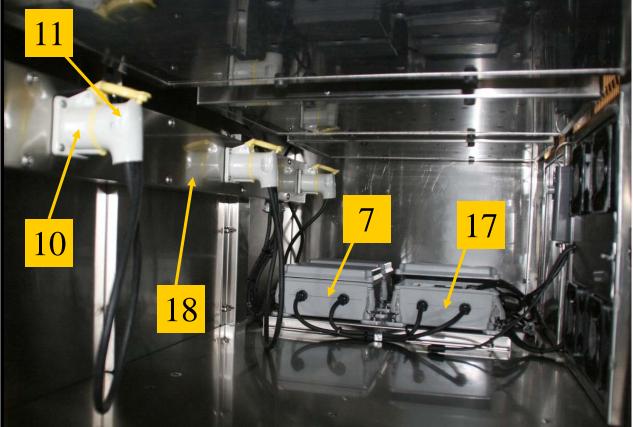


Illustration 7.A

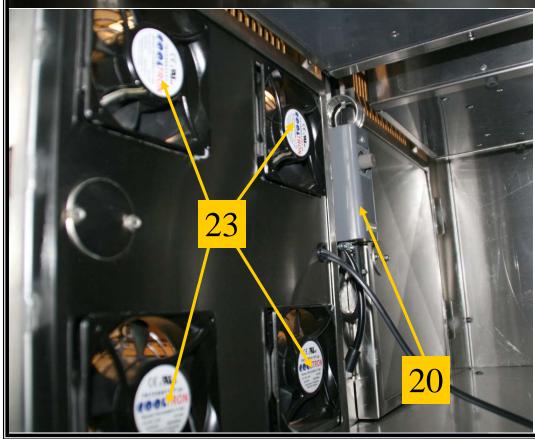



Illustration 7.B

Illustrations 7.C & 7.D

Breaker Box (7) & Distribution Block (17) Assemblies Detail



Illustration 7.C Illustration 7.D

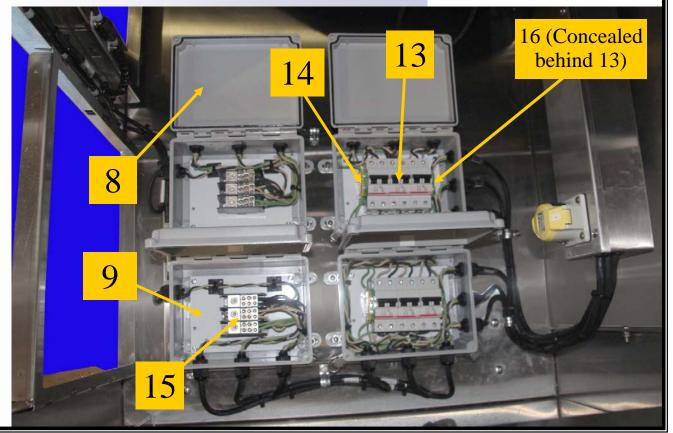

Illustrations 7.E & 7.F Ice Cream Drop-In (35) Detail



Illustration 7.E



Illustration 7.F

Illustrations 7.G & 7.H—Cabinet & Door Detail



Illustrations 7.I & 7.J—Dual Serving Module Detail (6)




<u>Illustrations 7.K & 7.L—Tray Rail & Leg Detail</u>



<u>Illustrations 7.M & 7.N—Flexible Serving Line Detail</u>



Illustration 7.M

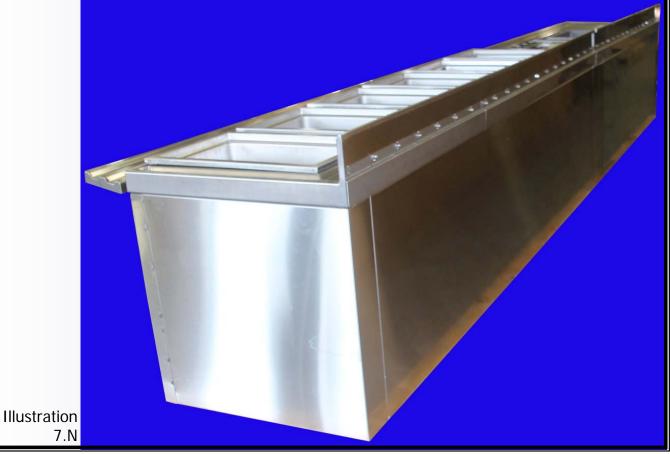

Chapter 8—Installation

8.1 Unpacking

Note: Before unpacking unit, note any crating markings and check for damage to crating and notify the carrier if there should appear to be damage to the equipment.

The unit is shipped from the factory securely fastened to a single shipping pallet protected by an external wrapping.

- 1. Carefully remove all external wrappings and other protective coverings.
- 2. Review the installation section of the manual completely prior to installing.
- 3. Discard crating materials.

8.2 Installation

1. Before moving the unit to the installation site, double-check passageways to make certain that it will move through without modifications.

Note: In certain instances, it may be necessary to remove the doors and hardware to negotiate tight spaces.

- 2. On most shipboard applications, a permanent base is fabricated by the ship builder to accommodate the base frame of the unit. If required Cospolich can furnish a foundation which can be attached to the deck. *Note: Not required on units with legs.*
- 3. Once the cabinet has been attached to the ship's foundation, it is necessary to apply a silicone sealant around the complete perimeter at the point that the cabinet base contacts the foundation. *Note:* Not required on units with legs.
- 4. Position the unit to allow sufficient ventilation, usually leave a 3" clearance from adjacent bulkheads and other equipment.
- 5. Level the cabinet from front to back and from side to side. This is important so that when securing to the deck base, the cabinet will not be pulled out of square.
- 6. Before applying electrical power to the unit, you should first check the electrical characteristics of the appliance and make certain that they agree with those of the electrical supply source. *CAUTION:* LOW OR EXCESSIVE VOLTAGE CAN SEVERELY DAMAGE THE ELECTRICAL SYSTEM.

Chapter 9—Modular Installation

9.1 Introduction

By design the modular version of the Wardroom Mess Serving Line Unit has been engineered and manufactured to be disassembled and reassembled aboard ship. By following these instructions you can be guaranteed a successful installation. Should questions arise or assistance be needed contact Cospolich customer service at (800)423-7761 or (985) 725-0222. Email cospolich@cospolich.com

9.2 Installation Skill Level

In general the skill level of the installer should be of a journeyman class in the area of mechanic. The primary process will require the following written instructions, use of common tools, and the proper fitting and alignment of the components. The electrical portion of the installation will be minimal, only requiring the unit to be plugged in and all electrical voltages verified.

9.3 Tools

Common tools required are standard/Phillips screwdrivers and wrenches. If the equipment is to be attached to a foundation, it may be necessary to drill holes.


9.4 Disassembly

NOTE: If the unit is to be disassembled prior to installation, please call Cospolich at (985) 725-0222 for assistance with disassembly and reassembly.


Chapter 10—Electrical and Mechanical

10 1	Introduction
10.1	This Gadotton
	This section of the manual contains drawings and schematics of the electrical and piping systems.

Illustration 10.A—Electrical Schematic—Cabinet

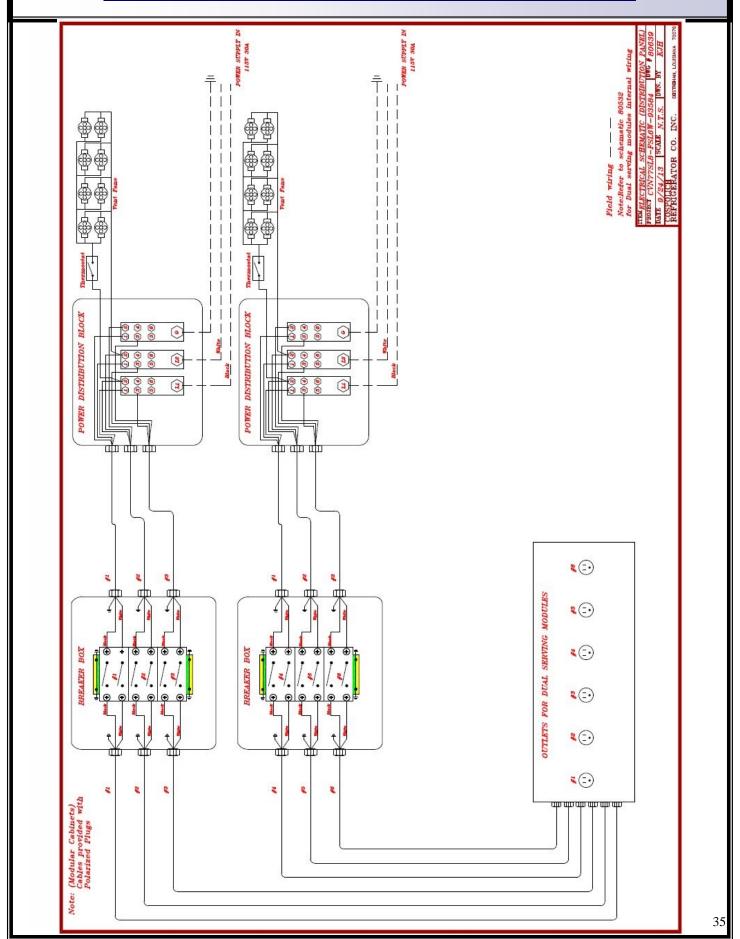

<u>Illustration 10.B—Electrical Schematic—Dual Serving Module</u>

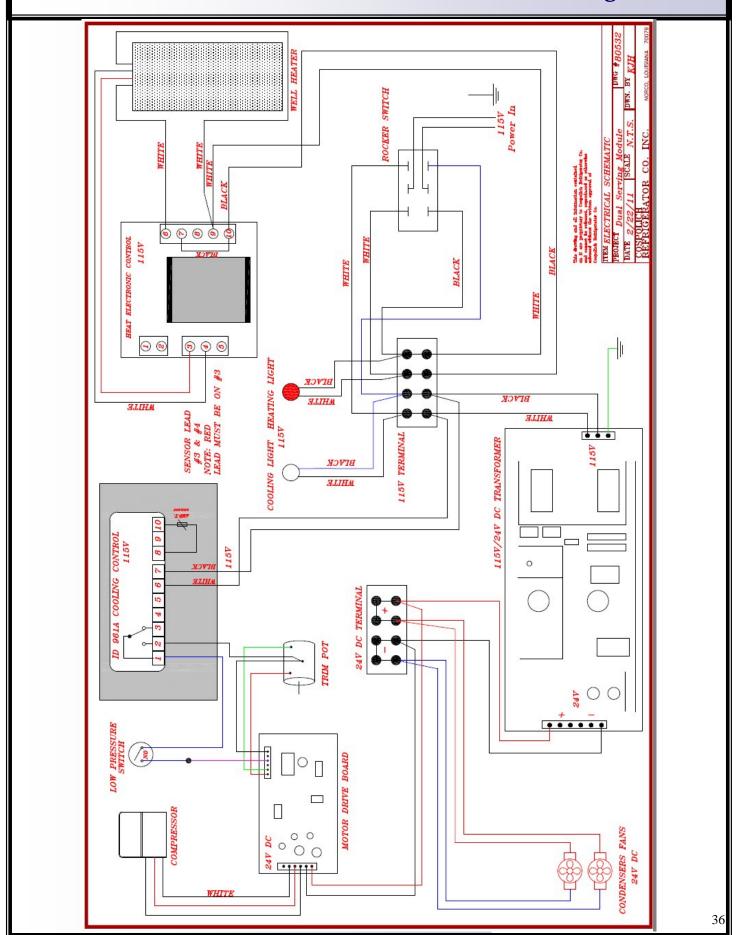

Chapter 11—Limited Warranty

Cospolich Inc. warrants their cabinets to consumers against defects in material or workmanship under normal use and service for a period of one year from the date of the shipment. We will repair or replace at our option, any part, assembly or portion thereof which Cospolich's examination discloses to be defective. Cospolich will pay the labor costs for the repair up to twelve (12) months from date of shipment.

In instances where the purchaser is not the owner in possession and the acceptance of Cospolich equipment is closely tied to the completion and delivery of the project, our warranty will begin on the acceptance date and will extend for one year.

Terms

Exclusions

Cospolich's obligations under this warranty shall not extend to any malfunction or other problem caused by unreasonable use, such as but not limited to, improper setting of controls, improper installation, improper voltage supply, loose electrical connections or blown fuses, and damage not attributable to a defect in workmanship. This warranty shall not apply to any cabinet or component part that has been suspect to any accident, alteration, abuse, misuse to any damage caused in fire, flood, or other acts of God and to any product that has been serviced by an unauthorized service person or company.

To secure Warranty Service

If you claim a defect under this warranty, direct your claim to whom you purchased the product, giving model, serial and code numbers with a description of the problem. Telephone calls should be directed to the service department at (800) 423-7761 or (985)725-0222 with fax request going to (985) 725-1564.

If the above procedure fails to satisfy your claim, you may write directly to the following address including the above identifying information.

DIRECTOR of CUSTOMER RELATIONS COSPOLICH INC. P.O. BOX 1206 DESTREHAN, LA 70047

There is not other express warranty on the Cospolich units except the terms stated herein. Any implied warrants of fitness and merchantability are limited in duration to the duration of this Warranty. The liabilities of Cospolich are limited solely and exclusively to replacement as stated herein and do not include any liability for any incidental, consequential or other damages of any kind whatsoever, whether any claim is based upon theories of contract negligence or tort. Some states do not allow limitations on how long an implied warranty lasts, or the exclusion of limitations of incidental or consequential damages. So the above limitations and exclusions may not apply to you. This warranty gives you specific legal rights and you may also have other rights that vary from state to state.

Appendix 1—Revision History

CHG NO.	DATE	DESCRIPTION OF CHANGE	CHG. BY	APP BY